



**PREMIER**  
CONDUIT


## Smoothwall Innerduct

Premier Smoothwall is manufactured from High Density Polyethylene (HDPE) and is intended for use in underground and innerduct applications. Smoothwall offers superior protection, increases pathways of existing duct systems and allows extra channels for future cabling needs. Cable can be installed by pre-installed pull-rope or jetting.

Interior Ribbedwall offers superior protection, increases pathways of existing duct systems and allows extra channels for future cabling needs. Interior Ribs dramatically reduce surface contact with cable during installation.

Smoothwall is available in 1", through 4". The standard colors are black or orange, and offered in a variety of other colors. Sequential marked footage is standard. Custom options, include up to four multiple colors per reel (up to 2") and pre-lubricated duct.

Installation Methods include plowing, open trench, directional boring or pulled through existing conduit.

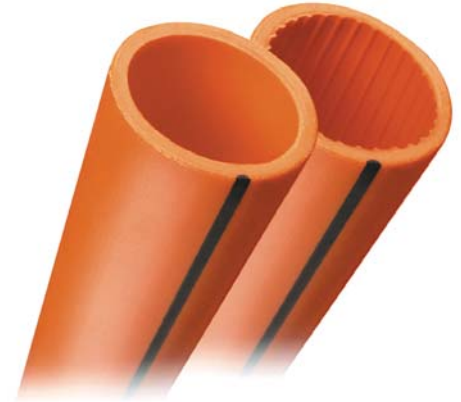

### Smoothwall Reel Put-ups

Reel Size	Color	Part No.	Wall	Outside Dimension	Inside Dimension	Max Pull Tension	Reel Size	Length (ft.)
1"	Black	SW-100-SDR11-7000	SDR 11	1.315	1.075	950	72-45-24	7000
1"	Black	SW-100-SDR13.5-1800	SDR 13.5	1.315	1.121	790	48-30-24	1800
1"	Black	SW-100-SDR13.5-7000	SDR 13.5	1.315	1.121	790	72-45-24	7000
1¼"	Black	SW-125-SDR11-5000	SDR 11	1.660	1.358	1520	82-45-30	5000
1¼"	Black	SW-125-SDR13.5-2500	SDR 13.5	1.660	1.414	1260	66-45-30	2500
1¼"	Black	SW-125-SDR13.5-5000	SDR 13.5	1.660	1.414	1260	82-45-30	5000
1¼"	Black	SW-125-SDR13.5-8000	SDR 13.5	1.660	1.414	1260	96-45-32	8000
1½"	Black	SW-150-SDR11-5000	SDR 11	1.900	1.554	1760	96-45-32	5000
1½"	Black	SW-150-SDR13.5-5000	SDR 13.5	1.900	1.618	1455	96-45-32	5000
1½"	Black	SW-150-SDR11.5-2500	SDR 13.5	1.900	1.618	1455	66-45-30	2500
2"	Black	SW-200-SCH40-2500	SCH 40	2.375	2.067	2300	82-45-40	2500
2"	Black	SW-200-SCH80-2500	SCH 80	2.375	1.939	3140	82-45-40	2500
2"	Black	SW-200-SDR11-4000	SDR 11	2.375	1.943	3105	96-45-32	4000
2"	Black	SW-200-SDR13.5-4000	SDR 13.5	2.375	2.023	2580	96-45-32	4000
3"	Black	SW-300-SDR13.5-1000	SDR 13.5	3.500	2.982	5590	96-45-68	1000
4"	Black	SW-400-SDR11-766	SDR 11	4.500	3.682	11145	102-45-68	766
4"	Black	SW-400-SDR13.5-766	SDR 13.5	4.500	3.834	9250	102-45-68	766

#### Sample Part Number

SW	100	SDR11	7000	T	RI	ST
Polyethylene (High Density)	Size 1 in. (I.D.)	Wall Rating	Length in Ft.	Polyster Tape 1250 lb.	Ribbed Interior	Striping

\* Standard Colors are Black or Orange. Other colors are available

1409 South Shore Drive  
 Erie, PA 16505  
 ph 814.451.0898  
 fax 814.459.1308  
[www.premierconduit.com](http://www.premierconduit.com)



Made in U.S.A.  
 TA-8/07